



Due to software upgrades, interface functions may vary. Please refer to the actual interface.
For technical support, contact FixInst after-sales service to obtain the latest user guide (all interface content is for illustration only and does not represent actual parameters)

Alarm Settings

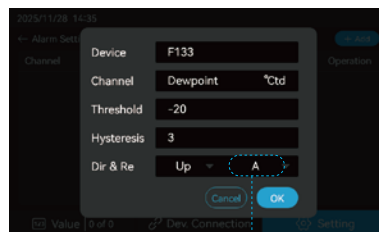

During alarm configuration, the red and green alarm indicators correspond to Relay [A]

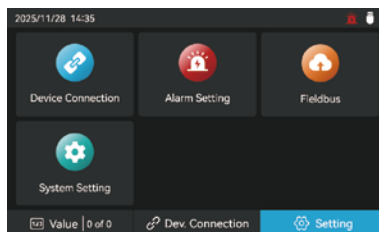

Attention!



www.fixinstruments.com

FIX Instruments Europe AB

Add: Diabasgatan 12, 25468 Helsingborg, Sweden


E-mail: sales@fixinstruments.com

FiXINST

F306x Series

QUICK GUIDE

| Dewpoint & Pressure Multi-parameter Monitor |

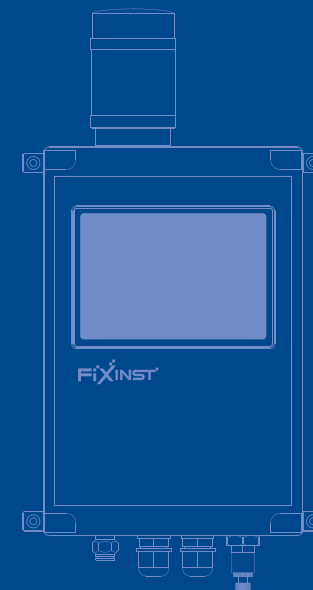

—Experts in Compressed Air and Fluid Measurement—


Confirm Packing List

To ensure smooth installation of the product, please check the packing list carefully within 7 calendar days after receiving the product, and if there are any discrepancies, please be sure to contact the seller within this period

No.	Description	Quantity	Note
1	F306x Dewpoint & Pressure Multi-parameter Monitor	1	Standard
2	Wall-mounted mounting Bracket	4	Standard
3	Power plug*	1	Standard
4	Teflon tubing + quick connector	1	Standard
5	Acoustic and visual alarm	1	Optional
6	Envelope (Calibration Certificate + Quick Guide)	1	Standard

* The power plug varies depending on the country of use


Product Functions & Electrical Wiring Diagram

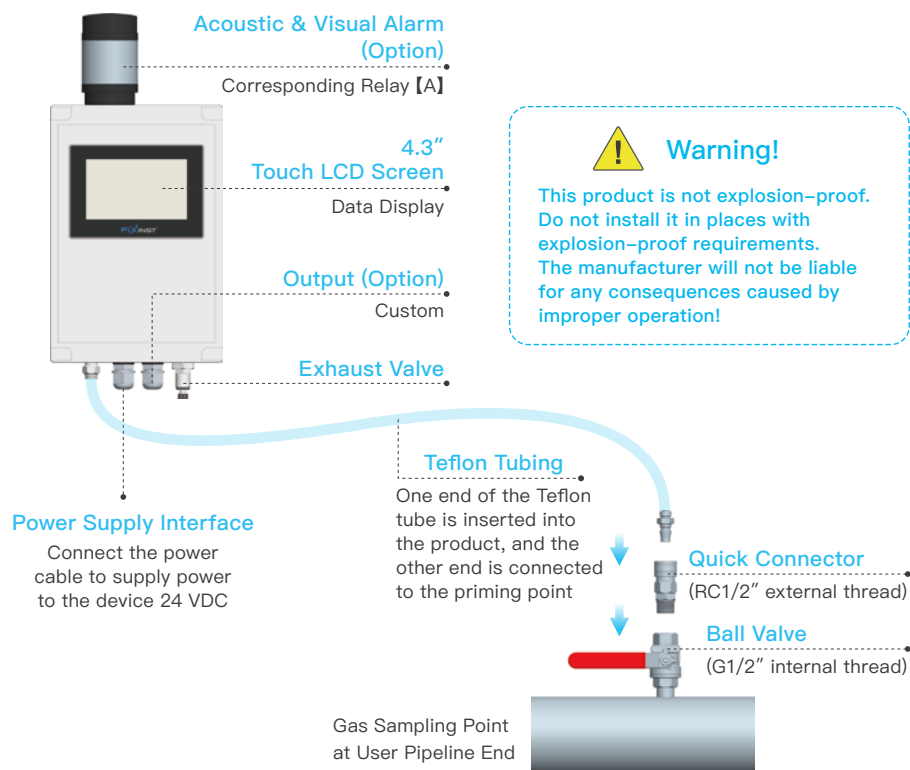

03-A Wall-mounted Installation

Step 1

Use a tool (such as a screwdriver) to release the panel clips at the four corners on both the front and back sides of the product (eight clips in total)

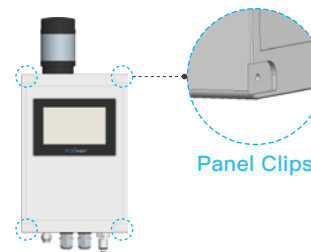


Step 2

Use a Phillips screwdriver to remove the four screws securing the front cover, then remove the front cover




Step 3

Take out the four user-supplied M3 self-tapping screws and mount the product in a suitable location through the four corner mounting holes

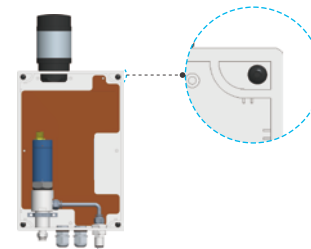

Step 4


Reinstall the front cover in the original position and refit the four front panel clips

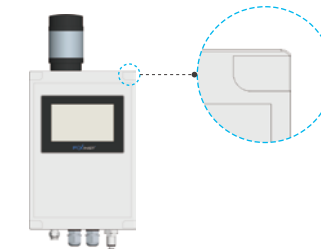

03-B Wall-mounted Installation (with Mounting Bracket)

Step 1

Take out the four mounting brackets and the matching four M3 self-tapping screws, place the brackets into the corresponding holes on the back side, and secure them with screws

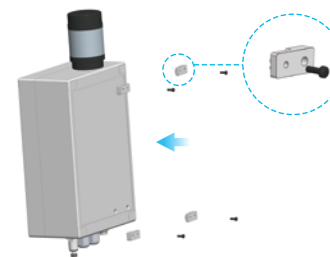

Step 2

Take out the four user-supplied M5 self-tapping screws, position the product at a suitable location, and secure it to the wall through the mounting brackets

